
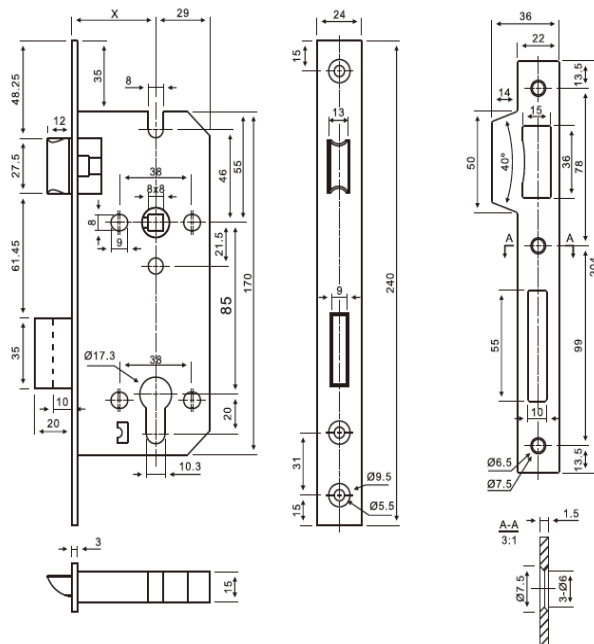


SASH LOCK UK-S 008-26 SERIES

Lockcase Reversible Direction

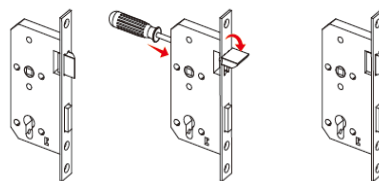

PRODUCT CLASSIFICATION

3 X 9 1 0 G 3 B C 2 0

• Certification	CE EN12209 / DIN 18251 Grade 3, 200,000 test cycles, EN1634: 240 Min Fire rated, EN1670: 240 hours Corrosion Resistance.
• CE Classification	3X910G3BC20
• Backset	45mm, 50mm, 60mm
• Distance	85mm
• Material	Solid SUS 304 Latchbolt & Deadbolt, Follower, SUS 304 Forend, Strike Plate.
• Forend & Strike Plate	Square or Radius
• Finish	SSS, PSS, PVD, PB, AB, AC
• Application	Entrance door of commercial and residential application.
• Suitable for	Wooden Door, Metal Door, Fire Door, Smoke Door, Interior Door, Outer Door, Swing Door, etc.

Model No.	Backset (mm)	C to C distance (mm)
UK-S 008-264585	45mm	85
UK-S 008-265085	50mm	85
UK-S 008-266085	60mm	85